

■ Features

- DIP 2"x1" package with industry standard pinout
- 8:1(9~75Vdc) ultra-wide input range
- Operating temperature range -40 ~ +90°C
- No minimum load required
- Comply to BS EN/EN55032 radiated Class A without additional components
- High efficiency up to 89%
- Protections: Short circuit (Continuous) / Overload / Over voltage / UVLO
- 3KVdc I/O isolation
- Remote ON/OFF control
- 3 years warranty

■ Applications

- Telecom/datacom system
- Wireless network
- Industrial control facility
- Instrument
- Analyzer
- Detector
- Data switch

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

SKA20W8 and DKA20W8 series are 20W isolated and regulated module type DC-DC converter with DIP 2"x1" package. It features international standard pins, a high efficiency up to 89%, wide working temperature range -40~+90°C , 3KVdc I/P-O/P isolation voltage, compliance to BS EN/EN55032 radiated Class A without additional components, continuous-mode short circuit, overload, over voltage, input under voltage protection etc. The models account for 9~75Vdc 8:1 ultra-wide input range, and various output voltage, 3.3V/5V/12V/15V/24V for single output and ±12V/±15V for dual outputs, which are suitable for all kinds of systems, Such as industrial control, telecommunication field, distributed power architecture, and so on.

■ Model Encoding

SKA20W8-12

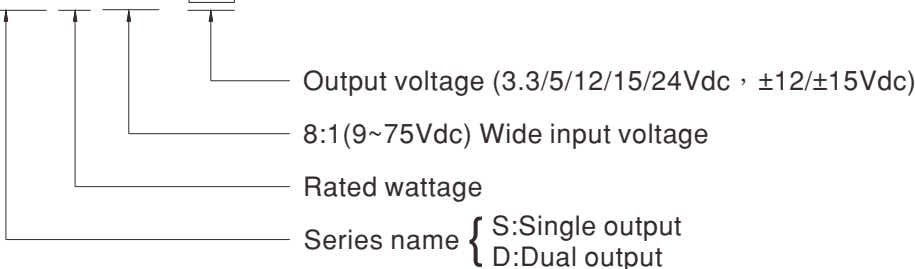



20W 2"x1" Package 8:1 Ultra-Wide Input DC-DC Regulated Converter

SKA20W8 & DKA20W8 series


MODEL SELECTION TABLE

| ORDER NO. | INPUT | | | OUTPUT | | EFFICIENCY (TYP.) | CAPACITOR LOAD (MAX.) |
|------------|---|---------------|-----------|----------------|----------------|-------------------|-----------------------|
| | INPUT VOLTAGE (RANGE) | INPUT CURRENT | | OUTPUT VOLTAGE | OUTPUT CURRENT | | |
| | | NO LOAD | FULL LOAD | | | | |
| SKA20W8-03 | Nominal 12V, 24V, 36V, 48V, 72V (9 ~ 75V) | 10mA | 809mA | 3.3V | 0~5000mA | 85% | 1000μF |
| SKA20W8-05 | | 10mA | 958mA | 5V | 0~4000mA | 88% | 1000μF |
| SKA20W8-12 | | 10mA | 947mA | 12V | 0~1666mA | 88% | 220μF |
| SKA20W8-15 | | 10mA | 947mA | 15V | 0~1333mA | 89% | 220μF |
| SKA20W8-24 | | 10mA | 947mA | 24V | 0~833mA | 89% | 100μF |
| DKA20W8-12 | | 20mA | 947mA | ±12V | ±0~833mA | 88% | *100μF |
| DKA20W8-15 | | 20mA | 947mA | ±15V | ±0~666mA | 88% | *100μF |

* For each output


| SPECIFICATION | | | |
|---|--|---|---|
| INPUT | | | |
| VOLTAGE RANGE | 9~75Vdc | | |
| SURGE VOLTAGE (100ms max.) | 100Vdc | | |
| FILTER | Pi network | | |
| PROTECTION | Fuse recommended 6A Slow-Blow | | |
| OUTPUT | | | |
| VOLTAGE ACCURACY | ±2% | | |
| RATED POWER | 20W | | |
| RIPPLE & NOISE | Note.2 | 150mVp-p | |
| LINE REGULATION | Note.3 | ±0.5% | |
| LOAD REGULATION | Note.4 | ±1% for 3.3Vdc output, ±0.5% for other output | |
| CROSS REGULATION | ±5% @ 25% ~ 100% load only dual output | | |
| SWITCHING FREQUENCY (Typ.) | 200KHz (PWM) | | |
| PROTECTION | | | |
| SHORT CIRCUIT | Protection type : Continuous, automatic recovery | | |
| OVERLOAD | 110 ~ 230% | | |
| | Protection type : Recovers automatically after fault condition is removed | | |
| OVER VOLTAGE | Clamp by TVS diodes | | |
| UNDER VOLTAGE LOCKOUT (Typ.) | Start-up voltage: 8.8Vdc | | |
| | Shutdown voltage: 7.5Vdc | | |
| FUNCTION | | | |
| REMOTE CONTROL (By request) | Power ON: R.C. ~ -Vin >2.5~30Vdc or open circuit ; Power OFF: R.C. ~ -Vin <1Vdc or short | | |
| ENVIRONMENT | | | |
| COOLING | Free-air convection | | |
| WORKING TEMP. | -40 ~ +90°C (Refer to "Derating Curve") | | |
| CASE TEMPERATURE | +110°C max. | | |
| WORKING HUMIDITY | 5% ~ 95% RH non-condensing | | |
| STORAGE TEMP., HUMIDITY | -55 ~ +125°C, 10 ~ 95% RH non-condensing | | |
| TEMP. COEFFICIENT | ±0.03% / °C (0 ~ 80°C) | | |
| SOLDERING TEMPERATURE | 1.5mm from case of 3 ~ 5 sec./265°C max. | | |
| VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | |
| SAFETY & EMC (Note.5) | | | |
| SAFETY STANDARDS | EAC TP TC 020/2011 approved | | |
| WITHSTAND VOLTAGE | I/P-O/P:3KVdc | | |
| ISOLATION RESISTANCE | I/P-O/P:1000M Ohms / 500Vdc / 25°C / 70% RH | | |
| ISOLATION CAPACITANCE (Typ.) | 1000pF | | |
| EMC EMISSION | Parameter | Standard | Test Level / Note |
| | Conducted | BS EN/EN55032(CISPR32) | N/A |
| | Radiated | BS EN/EN55032(CISPR32) | Class A without additional components Class B with additional components |
| EMC IMMUNITY | Parameter | Standard | Test Level / Note |
| | ESD | BS EN/EN61000-4-2 | Level 3, ±8KV air, Level 2, ±4KV contact |
| | Radiated Susceptibility | BS EN/EN61000-4-3 | Level 2, 3V/m |
| | EFT/Bursts | BS EN/EN61000-4-4 | Level 1, 0.5KV |
| | Surge | BS EN/EN61000-4-5 | Level 2, Line-Line ±0.5KV |
| | Conducted | BS EN/EN61000-4-6 | Level 2, 3V(e.m.f.) |
| Magnetic Field | BS EN/EN61000-4-8 | Level 1, 1A/m | |
| OTHERS | | | |
| MTBF | >600Khrs MIL-HDBK-217F(25°C) | | |
| DIMENSION (L*W*H) | 50.8*25.4*11.2mm (2*1*0.44 inch) | | |
| CASE MATERIAL | Six-side shielded case | | |
| PACKING | 31g ; 10pcs/per tube, 400pcs/40 tube/per carton | | |
| NOTE | | | |
| 1. All parameters are specified at normal input (24Vdc), rated load, 25°C 70% RH ambient. 2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µf & 47µf capacitor. 3. Line regulation is measured from low line to high line at rated load. 4. Load regulation is measured from 0% to 100% rated load. 5. The final equipment must be re-confirm that it still meet EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."(as available on http://www.meanwell.com) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx | | | |

Derating Curve

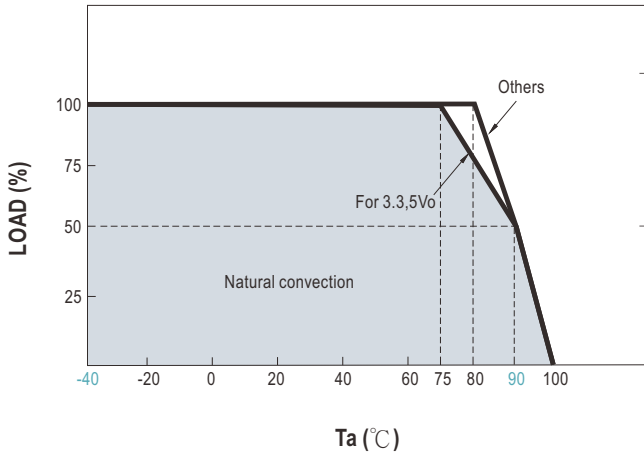

EMC Suggestion Circuit

※ Required external componets to meet BS EN/EN55032 radiated Class B emission as below:

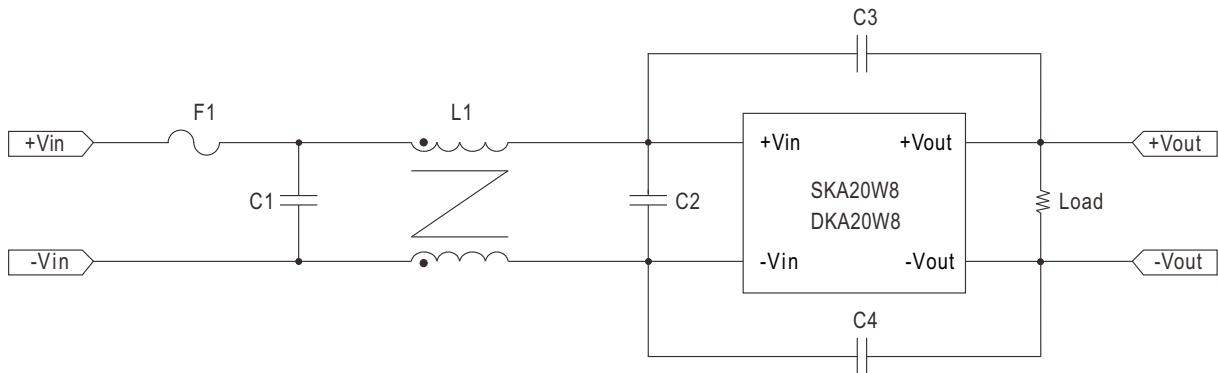

| Model No. | BS EN/EN55032 radiated Class B | | | | | |
|--------------------|--------------------------------|-----------|------------|------------|------------|-----------------------|
| | F1 | C1 | C2 | C3 | C4 | L1 |
| SKA20W8 DKA20W8 | Suggest 6A Slow-Blow Type | 47μF/100V | 2.2μF/100V | 1000pF/5KV | 1000pF/5KV | 325μH Common Choke |

External Output Trimming

In order to trim the voltage up or down one needs to connect the trim resistor either between the trim pin and -Vo for trim-up and between trim pin and +Vo for trim-down. This is shown in Figures 1 and 2:

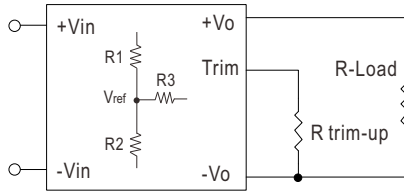


Figure 1. Trim-up Voltage Setup

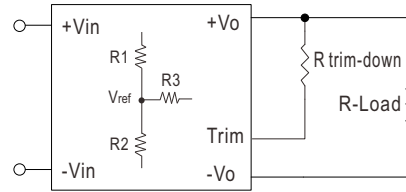


Figure 2. Trim-down Voltage Setup

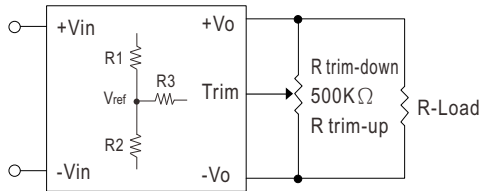


Figure 3. Trim-Connections

Table 1 – Trim up and Trim down Resistor Values

| Model Number | Output Voltage(V) | R1 (KΩ) | R2 (KΩ) | R3 (KΩ) | Vref |
|--------------|-------------------|---------|---------|---------|------|
| SKA20W8-03 | 3.3 | 2.43 | 1.47 | 7.5 | 1.24 |
| SKA20W8-05 | 5 | 1 | 1 | 3.6 | 2.5 |
| SKA20W8-12 | 12 | 3.83 | 1 | 7.5 | 2.5 |
| SKA20W8-15 | 15 | 7.5 | 1.5 | 11 | 2.5 |
| SKA20W8-24 | 24 | 8.66 | 1 | 8.2 | 2.5 |

1. The value of **Rtrim - up** defined as:

$$A = \left(\frac{V_{ref}}{V_o' - V_{ref}} \right) \times R1$$

$$R_{trim - up} = \left(\frac{A \times R2}{R2 - A} \right) - R3$$

Where

R_{trim-up} is the external resistor in Kohm.

V_{o, nom} is the nominal output voltage.

V_{o'} is the desired output voltage.

R1, R2, R3 and V_{ref} are internal to the unit and defined in Table 1.

For example, to trim-up the output voltage of 12V model (SKA20W8-12) by 10% to 13.2V, R_{trim-up} is calculated as follows:

$$V_{o, nom} = 12V$$

$$V_o' = 13.2V$$

$$R1 = 3.83 K\Omega$$

$$R2 = 1 K\Omega$$

$$R3 = 7.5 K\Omega$$

$$V_{ref} = 2.5V$$

$$A = \left(\frac{2.5}{13.2 - 2.5} \right) \times 3.83 = 0.894$$

$$\begin{aligned} R_{trim - up} &= \left(\frac{0.894 \times 1}{1 - 0.894} \right) - 7.5 \\ &= \left(\frac{0.894}{0.106} \right) - 7.5 \\ &= 0.933K\Omega \end{aligned}$$

2. The value of **R_{trim-down}** defined as:

$$A = \left(\frac{V_o' - V_{ref}}{V_{ref}} \right) \times R2$$

$$R_{trim-down} = \left(\frac{A \times R1}{R1 - A} \right) - R3$$

Where

R_{trim-down} is the external resistor in Kohm.

V_{o,nom} is the nominal output voltage.

V_{o'} is the desired output voltage.

R1, R2, R3 and Vref are internal to the unit and defined in Table 1.

For example, to trim-down the output voltage of 12V model (SKA20W8-12) by 10% to 10.8V, **R_{trim-down}** is calculated as follows:

$$V_{o,nom} = 12V$$

$$V_o' = 10.8V$$

$$R1 = 3.83 K\Omega$$

$$R2 = 1 K\Omega$$

$$R3 = 7.5 K\Omega$$


$$V_{ref} = 2.5V$$

$$A = \left(\frac{10.8 - 2.5}{2.5} \right) \times 1 = 3.32$$

$$\begin{aligned} R_{trim-down} &= \left(\frac{3.32 \times 3.83}{3.83 - 3.32} \right) - 7.5 \\ &= \left(\frac{12.715}{0.15} \right) - 7.5 \\ &= 17.431K\Omega \end{aligned}$$


Mechanical Specification

- All dimensions in mm(inch)
- Tolerance: x.x, x.xx ± 0.5mm (x.xx ± 0.02")
- Pin tolerance: $\phi 1 \pm 0.1$ mm


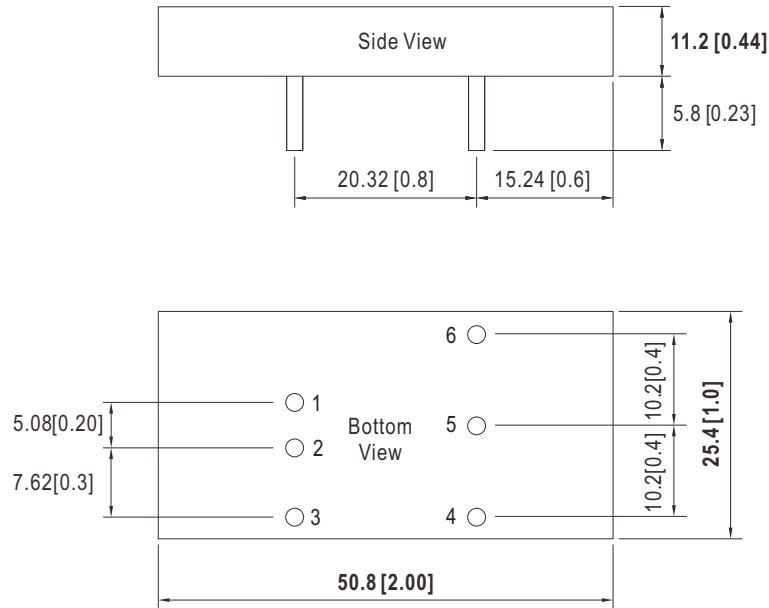


Pin Assignment

| Pin-Out | | |
|---------|----------------------------|--------------------------|
| Pin No. | SKA20W8 (Single output) | DKA20W8 (Dual output) |
| 1 | +Vin | +Vin |
| 2 | -Vin | -Vin |
| 3 | R.C. | R.C. |
| 4 | -Vout | -Vout |
| 5 | Trim | Common |
| 6 | +Vout | +Vout |

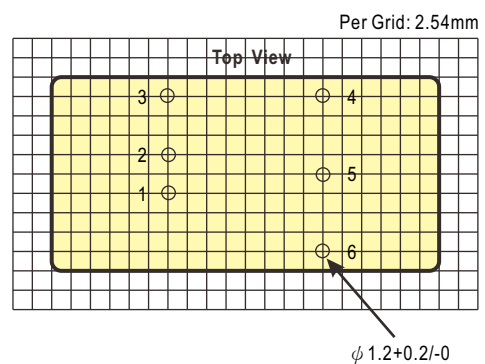

■ Packing
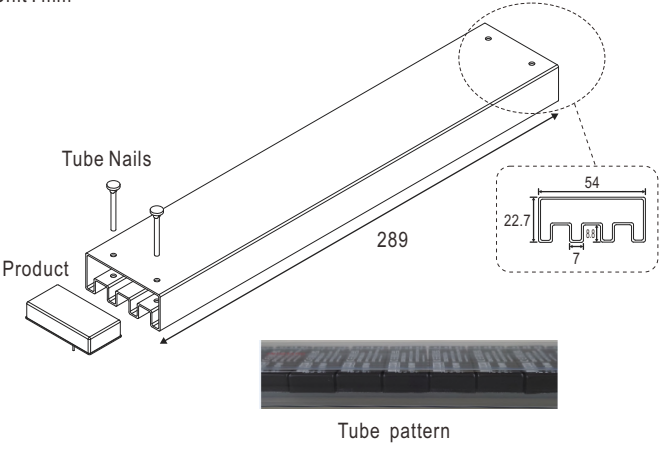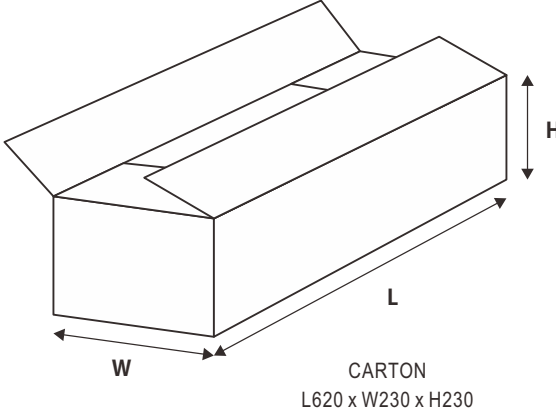
| Standard Tube Packing | MPQ Per Tube (PCS) | One Tube G.W. | Max. Q'TY/ Carton(PCS) | One Carton G.W. |
|---|--------------------|---------------|------------------------|-----------------|
| <p>Unit : mm</p>   <p>CARTON L620 x W230 x H230</p> | 10 | 398g | 400 | 16.72Kg |

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>