



1000W Slim Type with PFC Switching Supply

UHP-1000 series



■ Features

- Slim and Low profile (41mm)
- Fanless and conduction-cooled design
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- -30~+70°C working temperature
- Output voltage and constant current level programmable
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in remote ON-OFF control
- DC OK active signal
- Operating altitude up to 5000 meter (Note.7)
- LED indicator for power on
- 5 years warranty

■ Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipment or apparatus
- Test and measurement instrument
- Laser related machine
- Charging related equipment
- Household appliances
- Power Sourcing Equipment of PoE (48V model: DC O/P range 48~57.6V)


■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

UHP-1000 series is a 1000W single-output slim type power supply with 41mm of low profile design. Adopting the full range 90~264VAC input, the entire series provides an output voltage line of 12V,24V,36V and 48V. In addition to the high efficiency up to 96%, that the whole series operates from -30°C ~ 70°C under air convection without fan. UHP-1000 has the complete protection functions and 5G anti-vibration capability; It is complied with the international safety regulations such as TUV BS EN/EN62368-1, UL62368-1. UHP-1000 series serves as a high performance power supply solution for various industrial applications.


■ Model Encoding

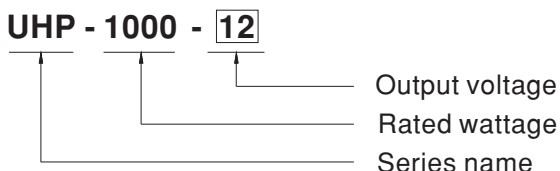


SPECIFICATION

| MODEL | | UHP-1000-12 | UHP-1000-24 | UHP-1000-36 | UHP-1000-48 | |
|--------------------------------|---|---|--|------------------------------|---|--|
| OUTPUT | DC VOLTAGE | 12V | 24V | 36V | 48V | |
| | RATED CURRENT | 80A | 42A | 28A | 21A | |
| | RATED POWER | 960W | 1008W | 1008W | 1008W | |
| | RIPPLE & NOISE (max.) Note.2 | 150mVp-p | 240mVp-p | 240mVp-p | 300mVp-p | |
| | VOLTAGE ADJ. RANGE | By built-in potentiometer, SVR | | | | |
| | | 12~14.4V | 24~28.8V | 36~43.2V | 48~57.6V | |
| | VOLTAGE TOLERANCE Note.3 | ±1.0% | ±1.0% | ±1.0% | ±1.0% | |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | |
| | LOAD REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | |
| SETUP, RISE TIME Note.4 | 1000ms, 50ms/230VAC 1000ms,50ms/115VAC at full load | | | | | |
| HOLD UP TIME (Typ.) | 12ms/230VAC | 12ms/115VAC | | | | |
| INPUT | VOLTAGE RANGE Note.4 | 90 ~ 264VAC | 250 ~ 370VDC | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | |
| | POWER FACTOR (Typ.) Note.4 | PF ≥0.95/230VAC PF ≥0.99/115VAC at full load | | | | |
| | EFFICIENCY (Typ.) | 94% | 95% | 95.5% | 96% | |
| | AC CURRENT (Typ.) | 10.1A/115VAC | 5.3A/230VAC | | | |
| | INRUSH CURRENT (Typ.) | Cold start 20A/115VAC | 40A/230VAC | | | |
| | LEAKAGE CURRENT | <0.75mA / 240VAC | | | | |
| PROTECTION | OVERLOAD | 105~120% rated output power Protection type: Constant current limiting with delay shutdown after 3 seconds, re-power on to recover | | | | |
| | SHORT CIRCUIT | Protection type: Constant current limiting with delay shutdown after 3 seconds, re-power on to recover | | | | |
| | OVER VOLTAGE | 14.5 ~ 16V | 29 ~ 33V | 43.5 ~ 49V | 59 ~ 66V | |
| | OVER TEMPERATURE | Protection type: Shut down O/P voltage, recovers automatically after temperature goes down | | | | |
| FUNCTION | OUTPUT VOLTAGE PROGRAMMABLE(PV) Note.5 | Adjustment of output voltage is allowable to 50 ~ 120% of nominal output voltage Please refer to the Function Manual. | | | | |
| | OUTPUT CURRENT PROGRAMMABLE(PC) Note.5 | Adjustment of constant current level is allowable to 20 ~ 100% of rated current. Please refer to the Function Manual. | | | | |
| | REMOTE ON/OFF CONTROL | Power ON: "Low" <0 ~ 0.5V or Short circuit Power OFF: "Hi" >2 ~ 5V or Open circuit | | | | |
| | AUXILIARY POWER | 12V@0.5A tolerance±10%, ripple 150mVp-p | | | | |
| | DC-OK SIGNAL | The TTL signal out, PSU turn on = 4.5 ~ 5.5V; PSU turn off = -0.1 ~ 0.5V. Please refer to the Function Manual. | | | | |
| ENVIRONMENT | WORKING TEMP. | -30 ~ +70°C (Refer to "Derating Curve") | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH non-condensing | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 50°C) | | | | |
| | VIBRATION | 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes | | | | |
| SAFETY & EMC (Note.6) | SAFETY STANDARDS | UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P: 3.75KVAC I/P-FG: 2KVAC O/P-FG: 1.25KVAC | | | | |
| | ISOLATION RESISTANCE | I/P-O/P, I/P-FG,O/P-FG: 100M Ohms/500VDC/25°C / 70%RH | | | | |
| | EMC EMISSION | Parameter | Standard | | Test Level / Note | |
| | | Conducted | BS EN/EN55032 (CISPR32) | | Class B | |
| | | Radiated | BS EN/EN55032 (CISPR32) | | Class B | |
| | | Harmonic Current | BS EN/EN61000-3-2 | | Class A | |
| | Voltage Flicker | BS EN/EN61000-3-3 | | ----- | | |
| | EMC IMMUNITY | BS EN/EN55035, BS EN/EN61000-6-2 | | | | |
| | | Parameter | Standard | | Test Level / Note | |
| | | ESD | BS EN/EN61000-4-2 | | Level 3, 8KV air ; Level 2, 4KV contact | |
| | | Radiated | BS EN/EN61000-4-3 | | Level 3 | |
| | | EFT / Burst | BS EN/EN61000-4-4 | | Level 3 | |
| Surge | | BS EN/EN61000-6-2 | | 2KV/Line-Line 4KV/Line-Earth | | |
| Conducted | | BS EN/EN61000-4-6 | | Level 3 | | |
| Magnetic Field | | BS EN/EN61000-4-8 | | Level 4 | | |
| Voltage Dips and Interruptions | BS EN/EN61000-4-11 | | >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods | | | |
| OTHERS | MTBF | 662.3K hrs min. Telcordia SR-332 (Bellcore) ; 69.8K hrs min. MIL-HDBK-217F (25°C) | | | | |
| | DIMENSION | 240*115*41mm (L*W*H) | | | | |
| | PACKING | 1.74kg ; 8pcs/14.9kg/0.74CUFT | | | | |
| NOTE | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance: includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltages. Please check the derating curve and Static characteristics for more details.</p> <p>5. PV/PC functions when users do not use SVR.</p> <p>6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)</p> <p>7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p> | | | | | |


■ BLOCK DIAGRAM

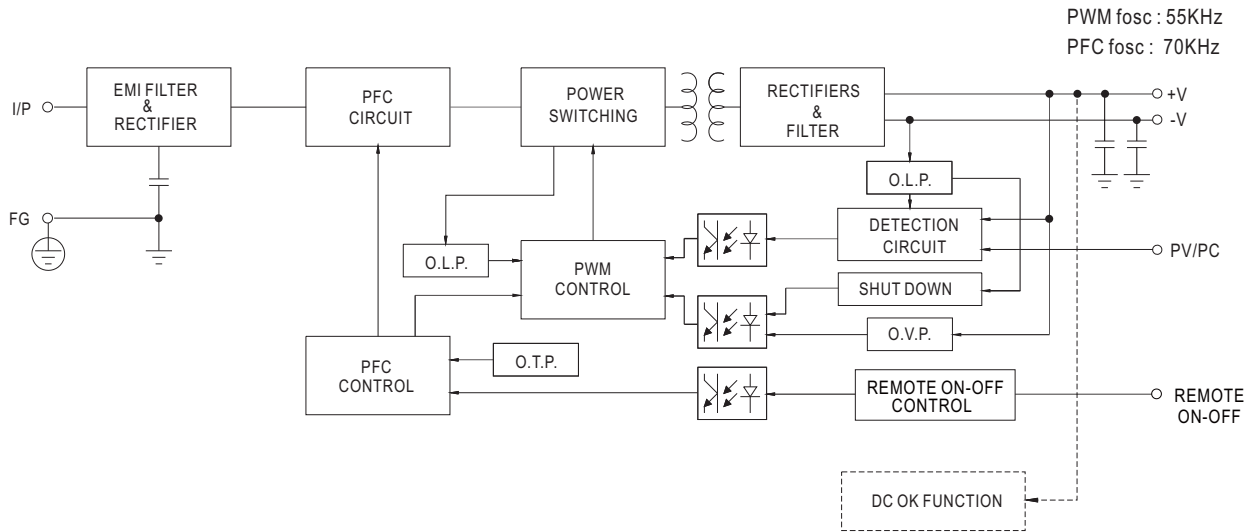





■ STATIC CHARACTERISTIC

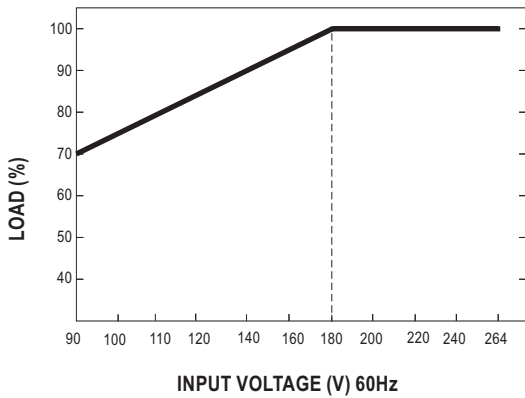

■ EFFICIENCY VS LOAD (48V MODEL)

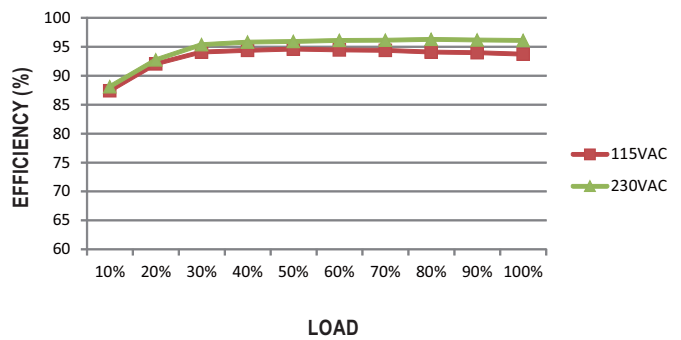




■ DERATING CURVE

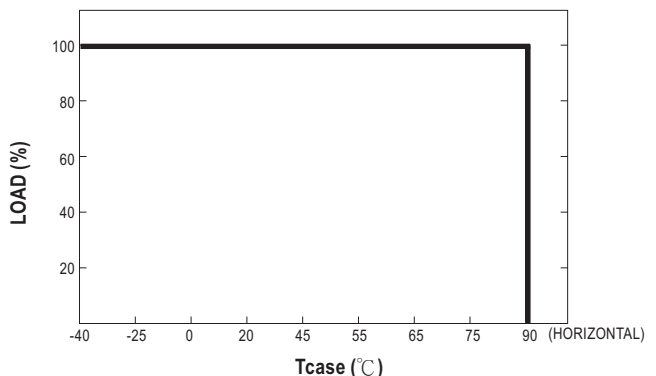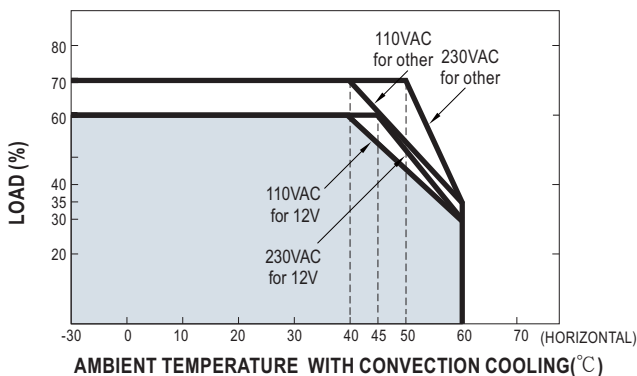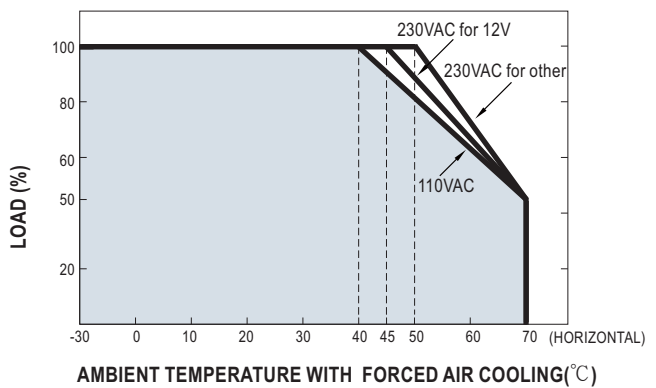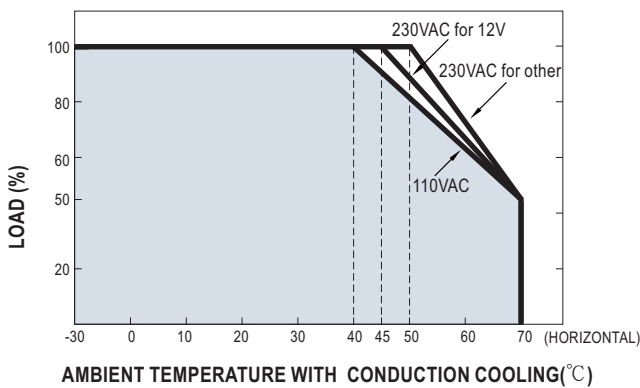

FUNCTION MANUAL

1. Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim)

※ In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying EXTERNAL VOLTAGE.

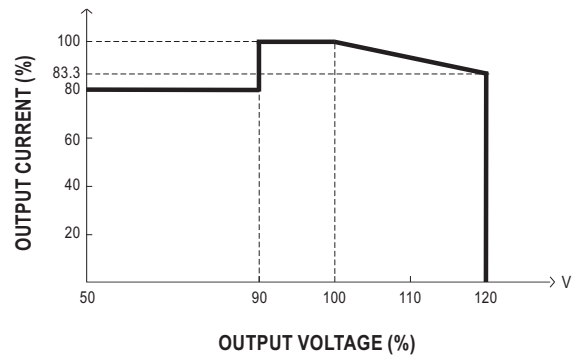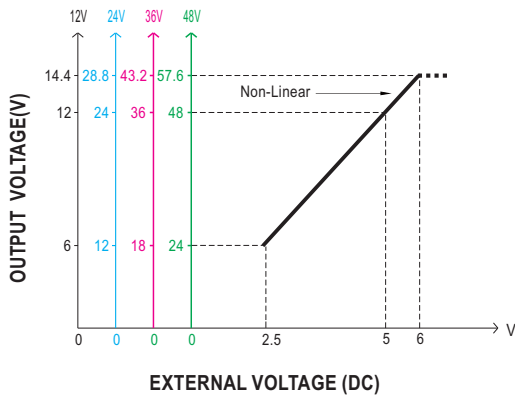
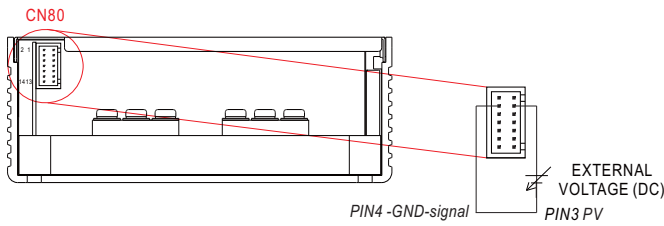


※ Caution: By factory default, the Output Voltage Programming is not activated, and PV (pin1) and PV-DIS(pin2) are shorted by connector. Whenever this function is not needed to activate, as assumed in other sections' diagrams, please keep PV (pin1) and PV-DIS(pin2) shorted ; otherwise the power supply will have no output.

※ Caution: When this function is needed to activate, please keep PV(pin1) and PV-DIS(pin2) opened.

2. Output Current Programming (or, PC / remote current programming / dynamic current trim)

※ The output current can be trimmed to 20~100% of the rated current by applying EXTERNAL VOLTAGE.

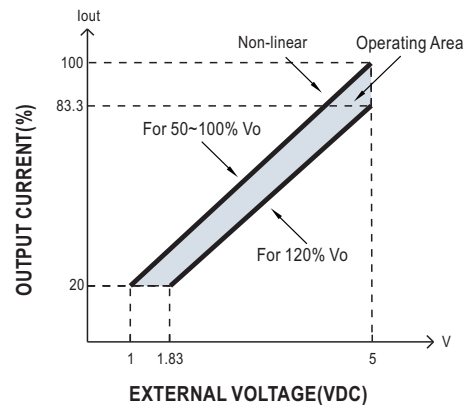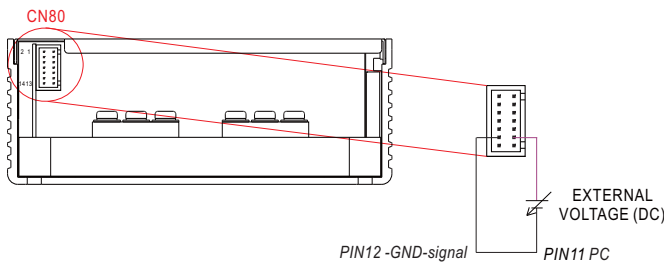


※ Caution: By factory default, the Output Current Programming is not activated, and VCCS(pin13) and PC-DIS(pin14) are shorted by connector. Whenever this function is not needed to activate, as assumed in other sections' diagrams, please keep VCCS(pin13) and PC-DIS(pin14) shorted ; otherwise, the power supply will have no output.

※ Caution: When this function is needed to activate, please keep VCCS(pin13) and PV-DIS(pin14) opened.

※ Covered by over temperature protection, auto de-rating function works under operation in PC mode .


T₁(Typ.): Maximum ambient temperature of full load.

T₂(Typ.): T₁+5°C .

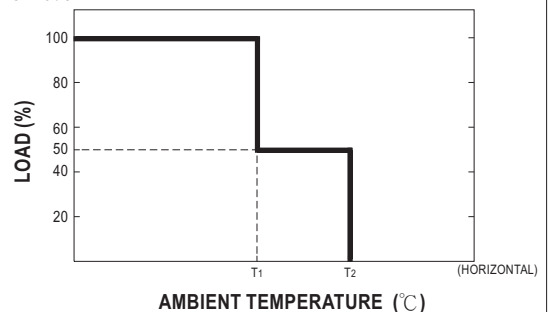

3. Remote ON-OFF Control


The power supply can be turned ON/OFF individually or along with other units in parallel by using the "Remote ON-OFF" function.

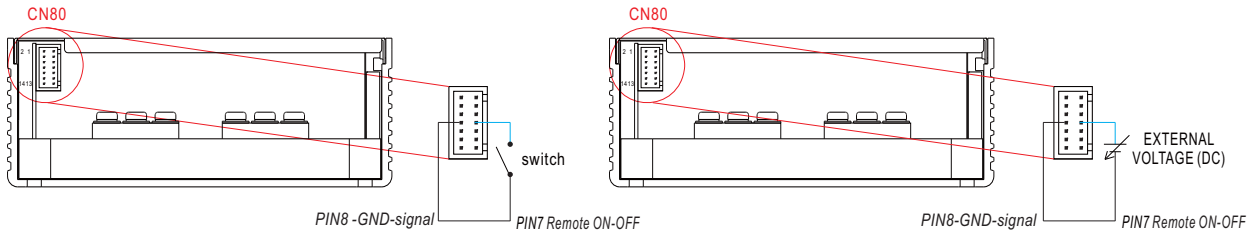

| Remote ON-OFF | Power Supply Status |
|--------------------------------|---------------------|
| "Low" <0~0.5V or Short circuit | ON |
| "Hi" >2~5V or Open circuit | OFF |

4. DC-OK Signal


DC-OK signal is a TTL level signal. The maximum sink current is 10mA and the maximum external voltage is 5.6V.

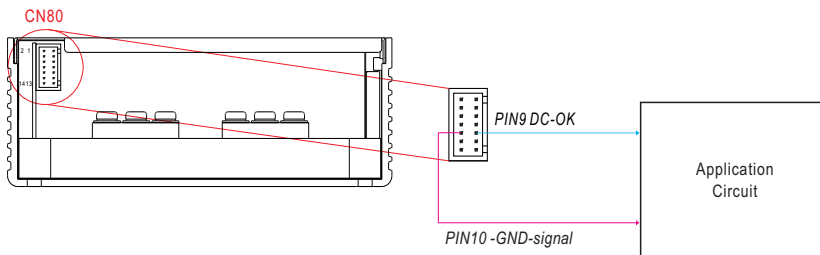

| DC-OK signal | Power Supply Status |
|------------------|---------------------|
| "Hi" >4.5~5.5V | ON |
| "Low" <-0.1~0.5V | OFF |

MECHANICAL SPECIFICATION

Case No.:272A Unit:mm

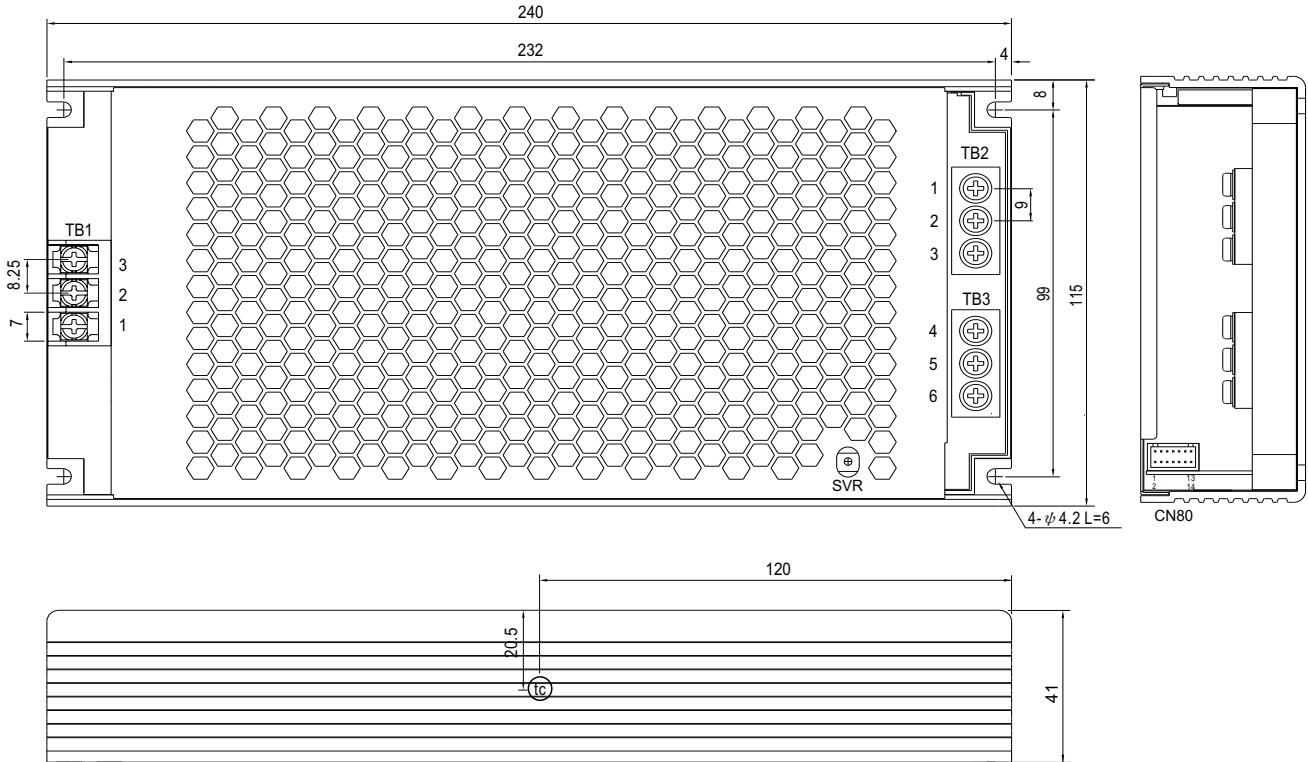

• (tc) : Max. Case Temperature


AC Input Terminal(TB1) Pin NO. Assignment

| Pin No. | Assignment | Terminal | Max mounting torque |
|---------|------------|---------------------|---------------------|
| 1 | AC/L | DECA T42-ES11-03 | 13.8Kgf-cm |
| 2 | AC/N | | |
| 3 | ⊕ | | |

DC Output Terminal (TB2,TB3) Pin NO. Assignment

| Pin No. | Assignment | Terminal | Max mounting torque |
|---------|------------|----------|---------------------|
| 1,2,3 | +V | (MW) | 8Kgf-cm |
| 4,5,6 | -V | NEL-400 | |

※Control Pin No. Assignment(CN80): HRS DF11-14DP-2DS or equivalent




| | |
|----------------|-----------------------------|
| Mating Housing | HRS DF11-14DS or equivalent |
| Terminal | HRS DF11-14SC or equivalent |

| Pin No. | Function | Description |
|-----------|---------------|---|
| 1,3 | PV | Connection for output voltage programming. |
| 2 | PV-DIS | Short connecting between PV (pin1) and PV-DIS (pin2) if output voltage programming function is not activated. |
| 4,8,10,12 | GND (Signal) | Negative output voltage signal. |
| 5 | +12V-AUX | Auxiliary voltage output, 10.8~13.2V, referenced to GND-AUX (pin6). The maximum load current is 0.5A. This output is not controlled by "Remote ON-OFF". |
| 6 | GND-AUX | Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V). |
| 7 | Remote ON-OFF | The unit can turn the output ON/OFF by electrical signal or dry contact between Remote ON/OFF. Short (0 ~ 0.5V): Power ON; Open (2 ~ 5V): Power OFF ; The maximum input voltage is 5.5V. |
| 9 | DC-OK | Low (-0.1 ~ 0.5V): When the $V_{out} \leq 80\% \pm 5\%$. High (4.5 ~ 5.5V): When $V_{out} \geq 80\% \pm 5\%$. The maximum sink current is 10mA and only for output. |
| 11 | PC | Connection for constant current level programming. |
| 13 | Vccs | Positive output voltage signal. |
| 14 | PC-DIS | Short connecting between Vccs (pin13) and PC-DIS (pin14) if output current programming function is not activated. |

Operate with additional aluminum plate and fan

In order to meet the "Derating Curve" and the "Static Characteristics", UHP-1000 series can be installed onto an aluminum plate (or the cabinet of the same size) on the bottom or apply forced air cooled solution. The size of the suggested aluminum plate and configuration of fan are shown as below. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and UHP-1000 series must be firmly mounted at the center of the aluminum plate.

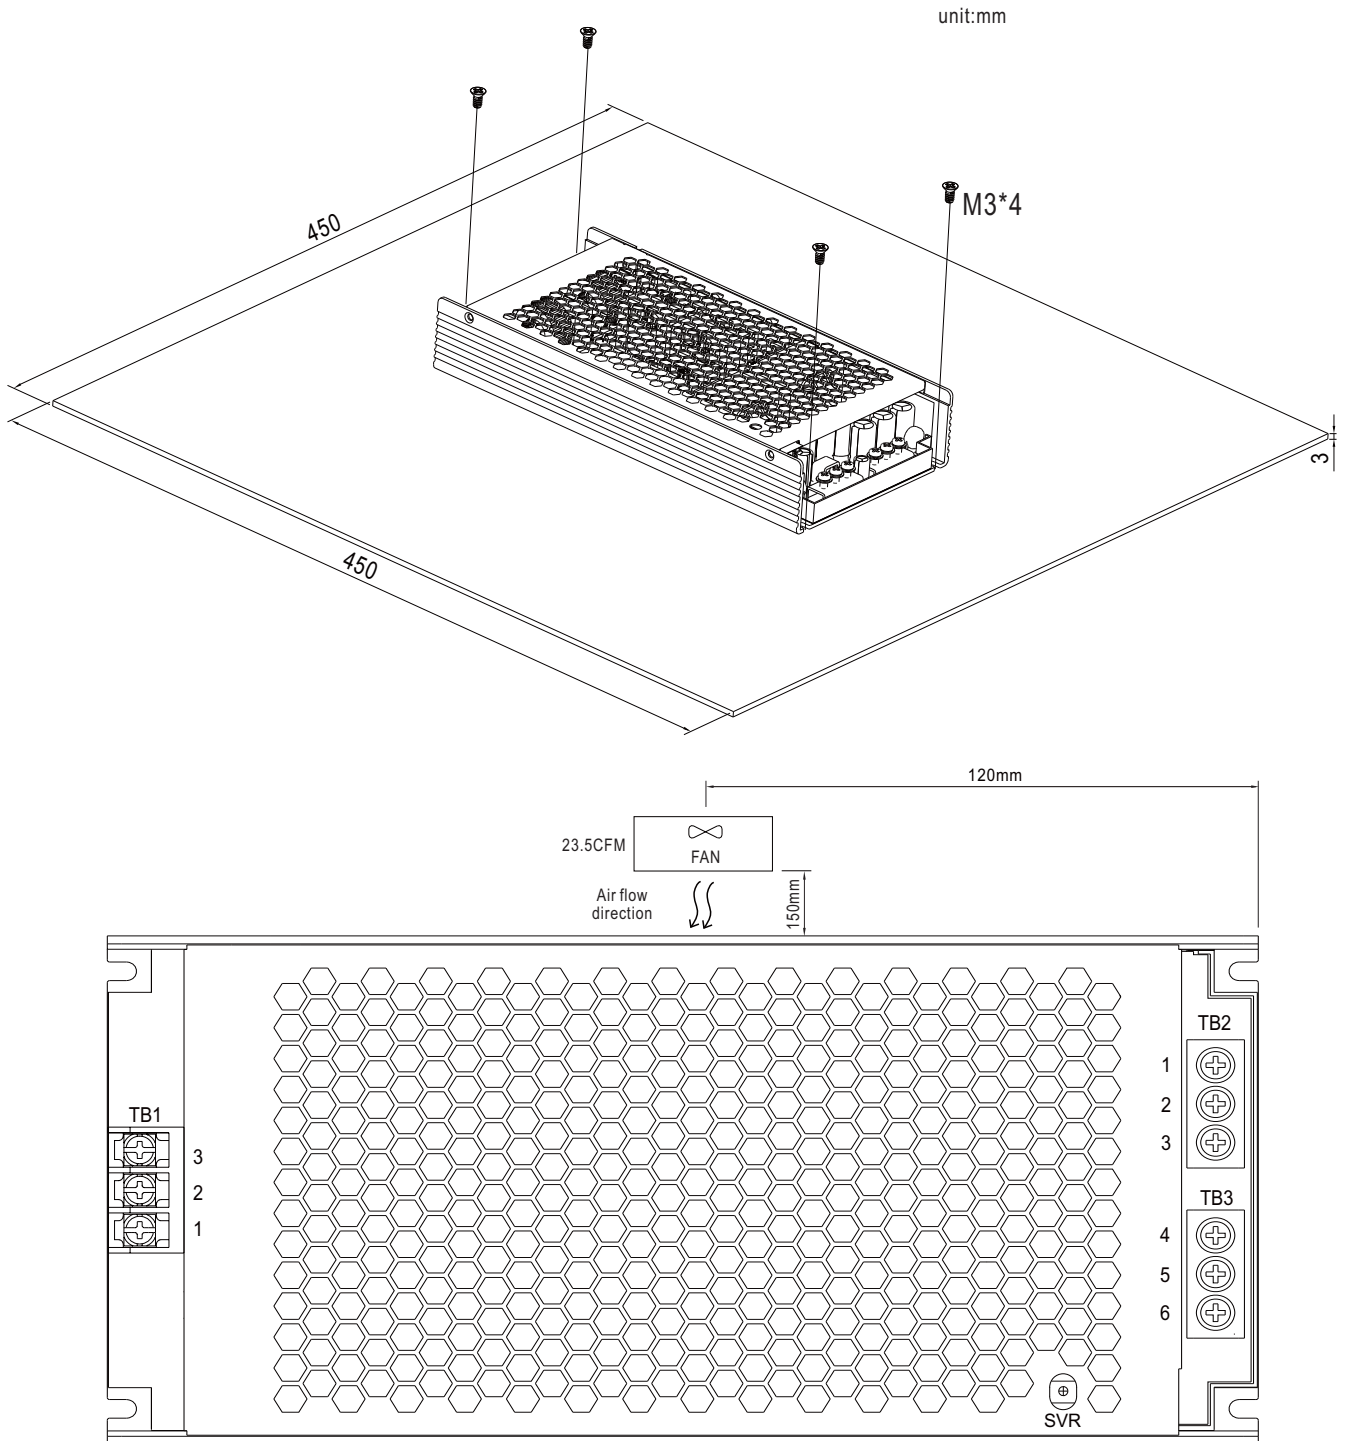

■ INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>