



Test Report: NSP-75-5

75W AC/DC High Reliable Multi-Industries Enclosed Type Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

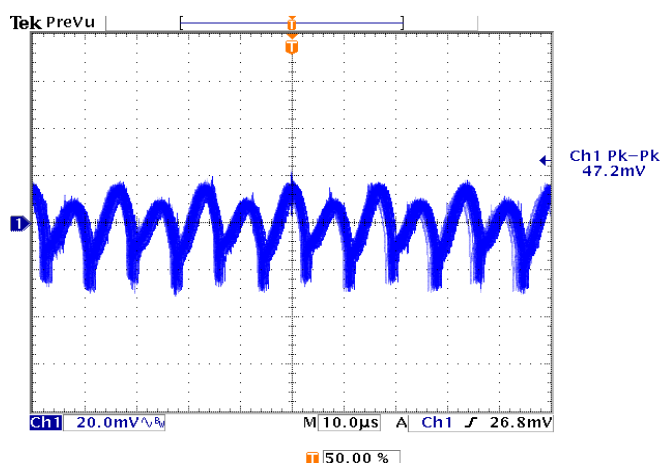
ENVIRONMENT TEST

DESIGN VERIFY TEST

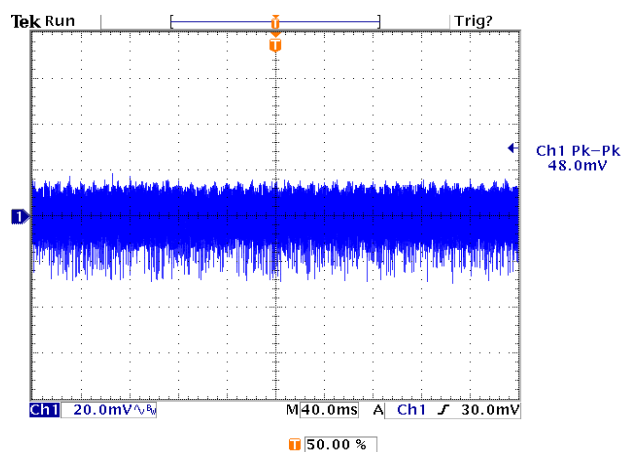
OUTPUT FUNCTION TEST

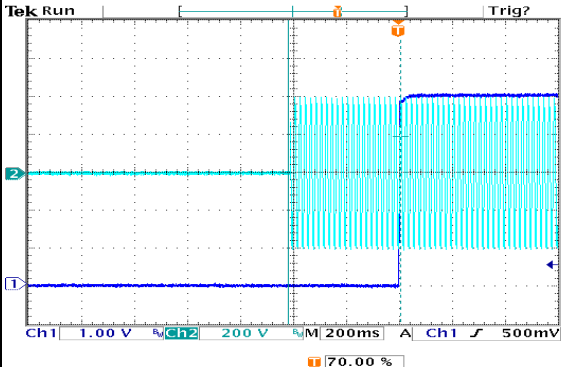
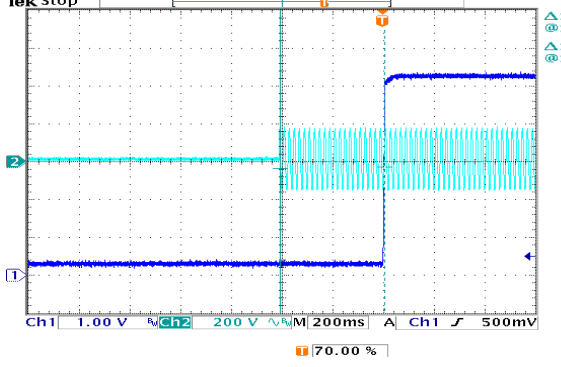
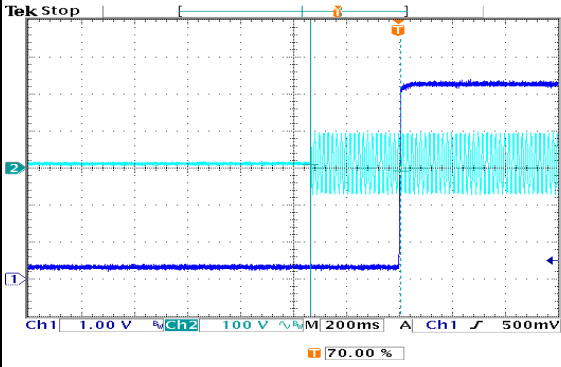
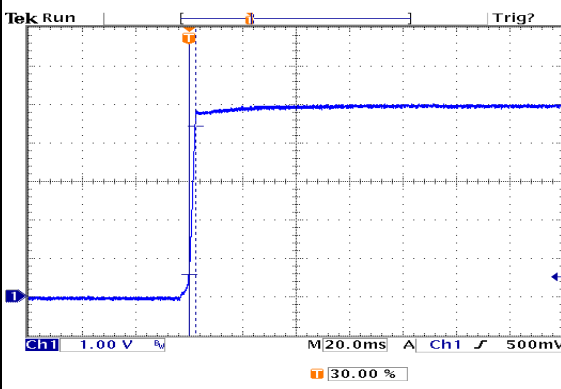
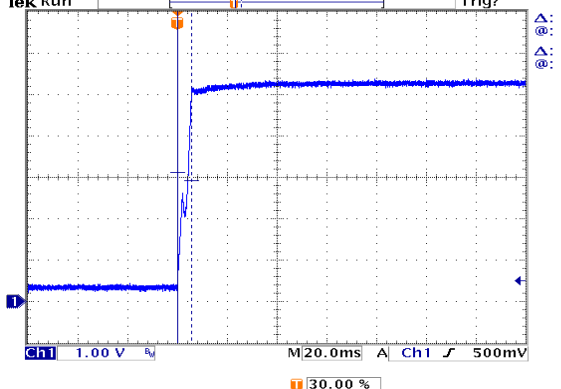
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 4.7V~5.5V	I/P : 230 VAC O/P : MIN LOAD Ta : 25°C	4.48V~5.726V/230VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -2 %~ 2%	I/P: 85VAC /305VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.6%~0.4%
3	LINE REGULATION	V1: -0.5%~ 0.5 %	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: -0.4%~ 0.4%
4	LOAD REGULATION	V1: -1 %~ 1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0 %~ 0.2%
5	OVER/UNDERSHOOT TEST	<± 10%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	7%
6	RIPPLE & NOISE (Max)	V1: 150 mVp-p	I/P: 230 VAC O/P: MIN LOAD—FULL LOAD Ta:25°C	V1:48 mVp-p / 100% load

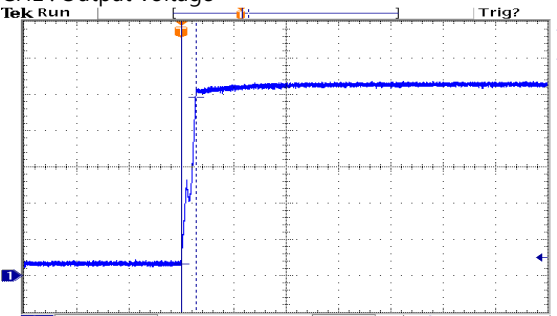
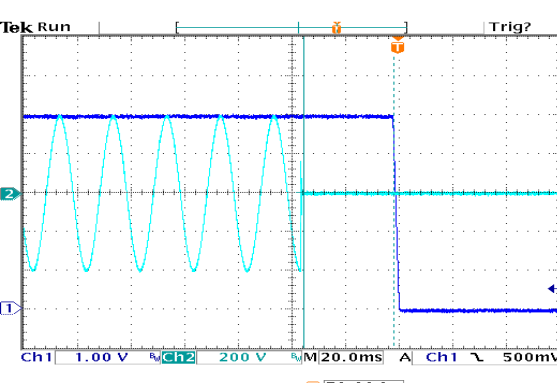
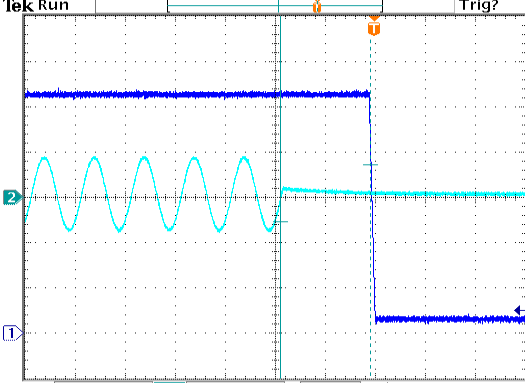
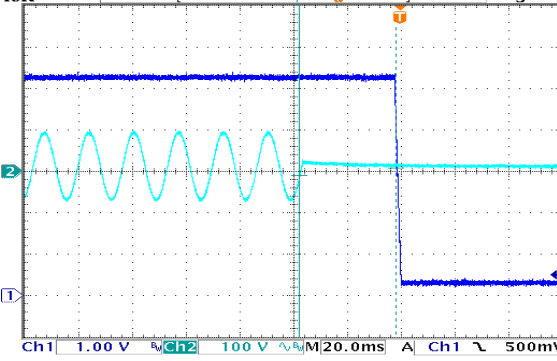
high frequency :

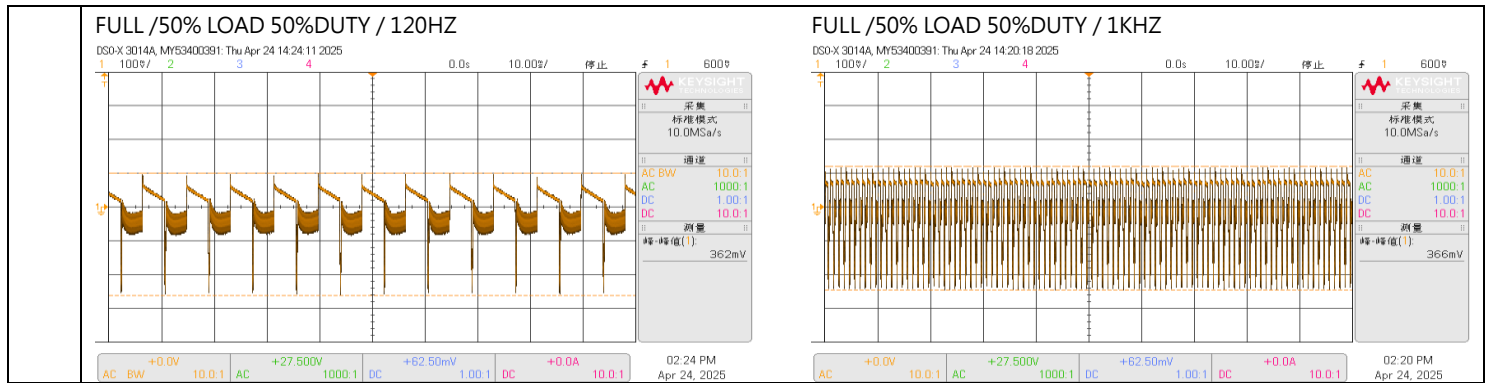


low frequency :



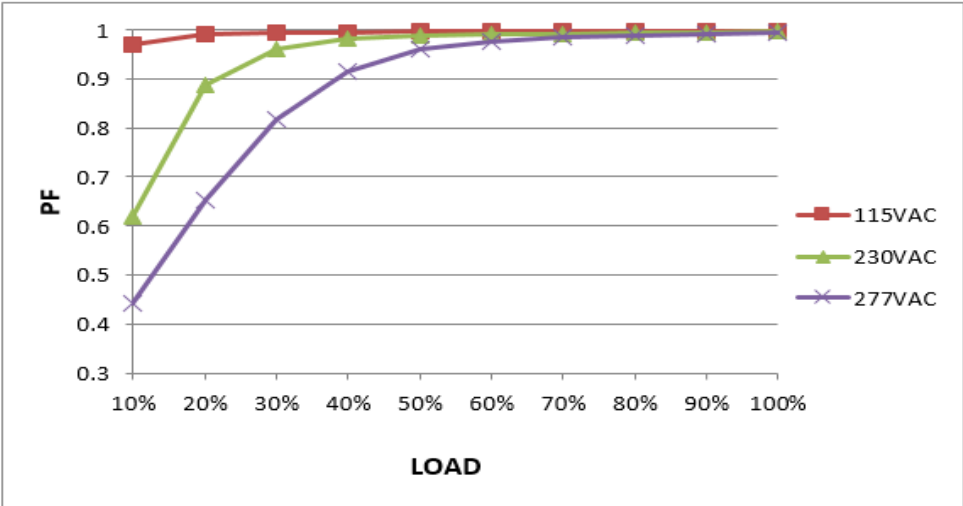
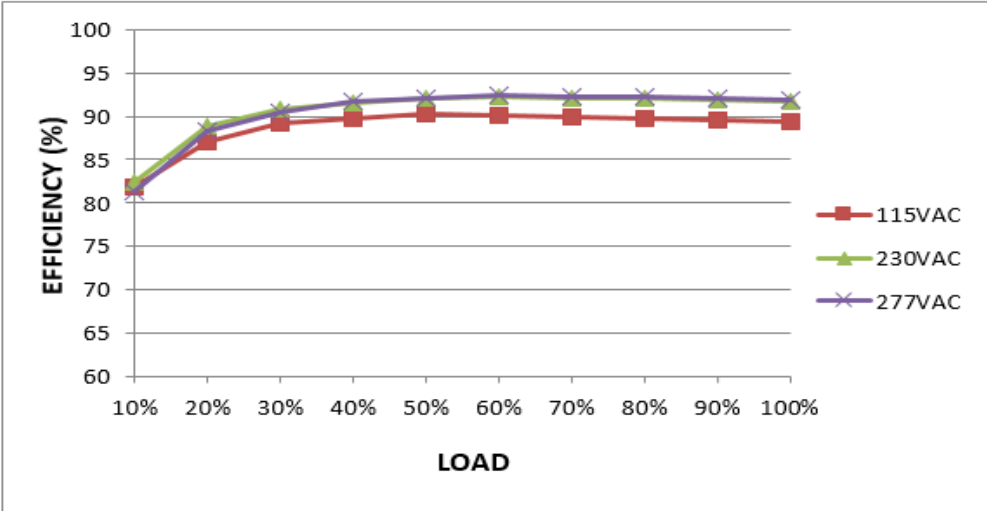
7	SET UP TIME(Max)	277VAC/1000ms 230VAC/1000ms 115VAC/1500ms	I/P : 277 VAC I/P : 230 VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	277VAC/424ms 230VAC/412ms 115VAC/340ms
	INPUT=277VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage  INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage  INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 			
8	RISE TIME (Max)	277VAC/80ms 230VAC/80ms 115VAC/80ms	I/P : 277 VAC I/P : 230 VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	277VAC/ 2.4ms 230VAC/ 5.6ms 115VAC/ 5.6 ms
	INPUT=277VAC/60HZ @ FULL LOAD CH1 : Output Voltage  INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 			

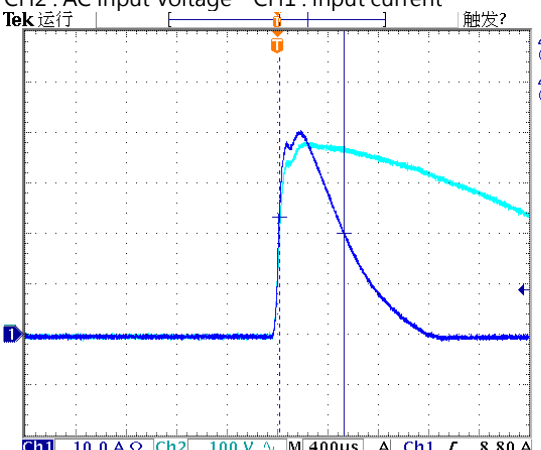
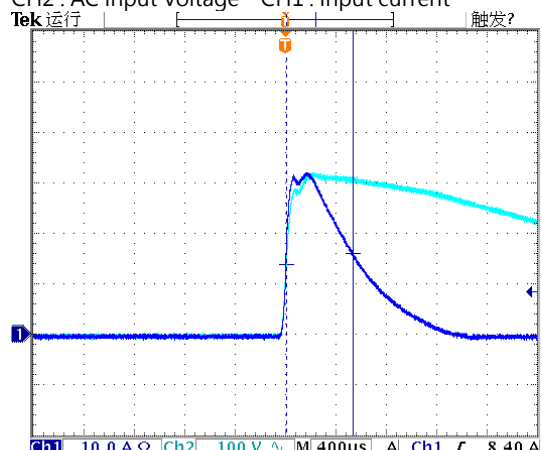
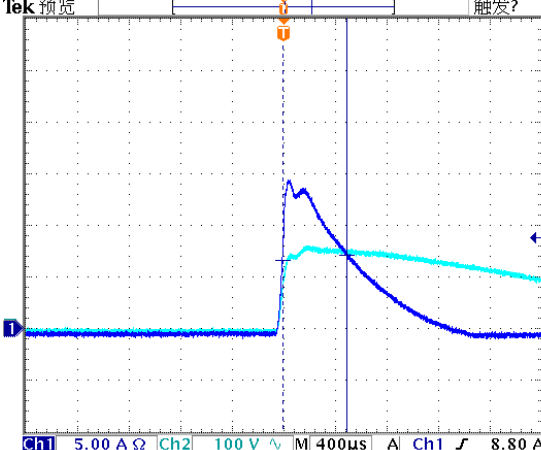
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage	 Trig? Δ: 4.60 V @: 320mV Δ: 5.60ms @: 0.00 s Ch1 1.00 V M20.0ms A Ch1 500mV	
9	HOLD UP TIME (Typ.)	277VAC/16ms 230VAC/16ms 115VAC/16ms	I/P : 277 VAC I/P : 230 VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C 277VAC/ 33.6 ms 230VAC/ 36 ms 115VAC/ 36 ms
	INPUT=277VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	 Trig? Δ: 0.00 V @: 8.00 V Δ: 33.6ms @: -35.6ms Ch1 1.00 V Ch2 200 V M20.0ms A Ch1 500mV	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage  Trig? Δ: 252 V @: -108 V Δ: 36.0ms @: -38.0ms Ch1 1.00 V Ch2 200 V M20.0ms A Ch1 500mV
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	 Trig? Δ: 18.0 V @: -10.0 V Δ: 36.0ms @: -38.0ms Ch1 1.00 V Ch2 100 V M20.0ms A Ch1 500mV	10 DYNAMIC LOAD V1: 1000mVp-p I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C 362mVp-p 366mVp-p



INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~305VAC 120VDC~ 431VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 82V~308 V (2) 117Vdc~434Vdc/FULL LOAD 117Vdc~434Vdc/50% LOAD (3) 117Vdc~434Vdc/FULL LOAD 117Vdc~434Vdc/50% LOAD
			I/P: LOW-LINE-3V=82V HIGH-LINE+10V=315 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: PASS
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:85 VAC ~305VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: PASS
3	INPUT CURRENT (Typ.)	277V/ 0.35 A 230V/ 0.4 A 115V/0.8 A	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.31A/ 277VAC I =0.36A/ 230VAC I =0.74A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current <350μA(rms)@277Vac	I/P : 277 VAC O/P : Min LOAD Ta : 25°C	L-FG : 227 μA N-FG : 227 μA
		Touch current <100μA(rms)@277Vac	I/P : 277 VAC O/P : Min LOAD Ta : 25°C	L-V+ : 55 μA L-V- : 54 μA N-V+ : 55 μA N-V- : 54 μA

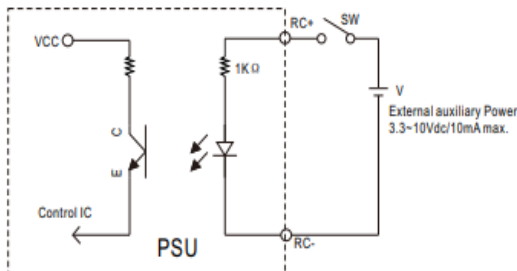
5	POWER FACTOR (Typ.)	0.90/277VAC 0.93/ 230VAC 0.98/ 115VAC	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.995/277VAC PF=0.997/230VAC PF=0.998/115VAC
	P.F vs LOAD 			
6	EFFICIENCY(Typ.)	90.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	91.7 %
	EFFICIENCY vs LOAD 			
7	NO LOAD POWER CONSUMPTION(Typ.)	Remote Power ON : 2W/277VAC 2W/230VAC 2W/115VAC Remote Power OFF : 0.5W/277VAC 0.5W/230VAC 0.3W/115VAC	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : RC ON/RC OFF Ta : 25°C	Remote Power ON : 0.8645W/277VAC 0.8781W/230VAC 0.9579W/115VAC Remote Power OFF : 0.3763W/277VAC 0.2937W/230VAC 0.1235W/115VAC

8	INRUSH CURRENT(Typ.)	277V/45A 230V/35A 115V/20A COLD START	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =40.4A/ 277VAC T50=512 us/277V I =32.0A/ 230VAC T50= 528 us/230V I =14.4A/ 115VAC T50= 496us/115V
INPUT=277VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH1 : Input current Tek 运行  △: 3.20 A @: 20.0 A △: 512µs @: 528µs Ch1 最大 40.4 A Ch1 10.0 A Ω Ch2 100 V V M 400µs A Ch1 8.80 A 50.00 % INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH1 : Input current Tek 运行  △: 2.20 A @: 16.0 A △: 528µs @: 536µs Ch1 最大 32.0 A Ch1 10.0 A Ω Ch2 100 V V M 400µs A Ch1 8.40 A 50.00 % INPUT=115VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH1 : Input current Tek 预览  △: 500mA @: 7.10 A △: 496µs @: 488µs Ch1 最大 14.4 A Ch1 5.00 A Ω Ch2 100 V V M 400µs A Ch1 8.80 A 50.00 %				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 %~ 170%	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: TESTING Ta:25°C	136.47%/ 305VAC 136.2%/ 230VAC 136.2%/85VAC Protection type : 105%-170%rated Output power; Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	5.8V~7.5V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	6.5V/ 305VAC 6.42V/ 230VAC 6.46V/ 85VAC Protection type : Shut down o/p voltage, AC re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, AC re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Protection type : Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT												
1	REMOTE ON/OFF CONTROL	2.Remote Control The PSU can be turned ON/OFF by using the "Remote Control" function with external switch and auxiliary power <table><tr><td>PSU Vo Status</td><td>Between RC-(pin1) and RC+(pin2) on CN1</td></tr><tr><td>POWER ON</td><td>Keep 0~0.8Vdc or open</td></tr><tr><td>POWER OFF</td><td>Keep 3.3~10Vdc by external voltage</td></tr></table> I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result : <table><tr><td>Between ON/OFF</td><td>Power Output Status</td></tr><tr><td>SW OFF (0~0.8V)</td><td>ON</td></tr><tr><td>SW ON (3.3~10V)</td><td>OFF</td></tr></table>	PSU Vo Status	Between RC-(pin1) and RC+(pin2) on CN1	POWER ON	Keep 0~0.8Vdc or open	POWER OFF	Keep 3.3~10Vdc by external voltage	Between ON/OFF	Power Output Status	SW OFF (0~0.8V)	ON	SW ON (3.3~10V)	OFF		
PSU Vo Status	Between RC-(pin1) and RC+(pin2) on CN1															
POWER ON	Keep 0~0.8Vdc or open															
POWER OFF	Keep 3.3~10Vdc by external voltage															
Between ON/OFF	Power Output Status															
SW OFF (0~0.8V)	ON															
SW ON (3.3~10V)	OFF															

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q6 Rated 650 V/11 A	AC ON/OFF I/P:High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. I/P:Low-Line -3V = 82V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1) 435V (2) 443V (3) 439V (4) 431V (5) 431V (6) 431V (7) 427V VDS: (1) 427V (2) 423V (3) 423V (4) 423V (5) 423V (6) 427V (7) 423V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 650 V/15A	I/P:High-Line +3V =308V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load.	VDS: (1) 519V (2) 439V (3) 487V (4) 452V (5) 456V (6) 483V (7) 419V

			I/P:Low-Line -3V =82V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1) 491V (2) 447V (3) 487V (4) 460V (5) 464V (6) 463V (7) 451V
3	P.F.C DIODE	D8 Rated 4 A/650V	I/P:High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz I/P:Low-Line -3V = 82V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1) 438V (2) 418V (3) 430V (4) 438V (1) 450V (2) 442V (3) 450V (4) 454V
4	Diode Peak Voltage	Q100 Rated 160A/30 V Q101 Rated 160A/30 V	AC ON/OFF I/P:High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q100: VDS: (1) 14.3V (2) 7.63V (3) 14.7V (4) 14.3V (5) 14.1V (6) 13.5V (7) 13.3V (8) 12.9V

				Q101: VDS: (1) 14.1V (2) 5.73V (3) 14.3V (4) 14.5V (5) 14.5V (6) 13.7V (7) 13.9V (8) 13.1V
5	Input Capacitor Voltage	C5 Rated: 68μ/ 450V Surge voltage:500V	I/P:High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1)439V (2)447V (3)439V (4) 435V
6	Control IC Voltage Test	PWM IC U1 Rated -0.4 V~ 30 V O/P IC U100 Rated -0. 3V~ 38V	AC ON/OFF I/P:High-Line +3V =308 V O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(LOW LINE) Ta:25°C	U1 (1) 18.6V (2) 18.6V (3) 18.6V (4) 18.6V (5) 12.4V U100 (1) 11.7V (2) 11.3V (3) 11.3V (4) 11.3V (5) 5.93V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.2 K VAC/min I/P-FG : 2.1 K VAC/min O/P-FG: 1.5 KVAC/min	I/P-O/P: 4.62 KVAC/min I/P-FG: 2.52 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 1.906 mA I/P-FG: 1.942 mA O/P-FG: 1.537 mA
2	ISOLATION RESISTANCE	I/P-O/P: 500 VDC>100MΩ I/P-FG: 500 VDC>100MΩ O/P-FG: 500 VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: >9999 MΩ I/P-FG: >9999 MΩ O/P-FG: >9999 MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	10 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32),CNS 15936 EN/EN55014-1(CISPR14-1) EN/EN55011(CISPR11)	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32),CNS 15936 EN/EN55014-1(CISPR14-1) EN/EN55011(CISPR11)	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																								
1	TEMPERATURE RISE TEST	MODEL : NSP-75-5 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=25.8 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=63.2 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=27.1 °C</th><th>HIGH AMBIENT Ta=51.6 °C</th></tr><tr><td>1</td><td>LF1</td><td>47.5°C</td><td>83.7°C</td></tr><tr><td>2</td><td>C2</td><td>53.1°C</td><td>86.7°C</td></tr><tr><td>3</td><td>RTH1</td><td>64.6°C</td><td>92.2°C</td></tr><tr><td>4</td><td>L1</td><td>53.0°C</td><td>86.1°C</td></tr><tr><td>5</td><td>L2</td><td>52.4°C</td><td>87.0°C</td></tr><tr><td>6</td><td>C10</td><td>52.8°C</td><td>87.4°C</td></tr><tr><td>7</td><td>Q1</td><td>49.7°C</td><td>86.4°C</td></tr><tr><td>8</td><td>C5</td><td>50.7°C</td><td>85.8°C</td></tr><tr><td>9</td><td>U2</td><td>62.1°C</td><td>97.9°C</td></tr><tr><td>10</td><td>C36</td><td>56.7°C</td><td>93.5°C</td></tr><tr><td>11</td><td>BD1</td><td>58.3°C</td><td>91.6°C</td></tr><tr><td>12</td><td>D8</td><td>58.3°C</td><td>92.9°C</td></tr><tr><td>13</td><td>Q5</td><td>56.6°C</td><td>92.6°C</td></tr><tr><td>14</td><td>T1</td><td>79.8°C</td><td>116.1°C</td></tr><tr><td>15</td><td>C202</td><td>61.7°C</td><td>98.3°C</td></tr><tr><td>16</td><td>C105</td><td>69.8°C</td><td>107.0°C</td></tr><tr><td>17</td><td>U100</td><td>78.7°C</td><td>114.4°C</td></tr><tr><td>18</td><td>U101</td><td>56.5°C</td><td>93.1°C</td></tr><tr><td>19</td><td>Q100</td><td>76.7°C</td><td>108.6°C</td></tr><tr><td>20</td><td>RTH3</td><td>58.4°C</td><td>96.0°C</td></tr><tr><td>21</td><td>LF1</td><td>47.5°C</td><td>83.7°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta=27.1 °C	HIGH AMBIENT Ta=51.6 °C	1	LF1	47.5°C	83.7°C	2	C2	53.1°C	86.7°C	3	RTH1	64.6°C	92.2°C	4	L1	53.0°C	86.1°C	5	L2	52.4°C	87.0°C	6	C10	52.8°C	87.4°C	7	Q1	49.7°C	86.4°C	8	C5	50.7°C	85.8°C	9	U2	62.1°C	97.9°C	10	C36	56.7°C	93.5°C	11	BD1	58.3°C	91.6°C	12	D8	58.3°C	92.9°C	13	Q5	56.6°C	92.6°C	14	T1	79.8°C	116.1°C	15	C202	61.7°C	98.3°C	16	C105	69.8°C	107.0°C	17	U100	78.7°C	114.4°C	18	U101	56.5°C	93.1°C	19	Q100	76.7°C	108.6°C	20	RTH3	58.4°C	96.0°C	21	LF1	47.5°C	83.7°C
NO	Position	ROOM AMBIENT Ta=27.1 °C	HIGH AMBIENT Ta=51.6 °C																																																																																									
1	LF1	47.5°C	83.7°C																																																																																									
2	C2	53.1°C	86.7°C																																																																																									
3	RTH1	64.6°C	92.2°C																																																																																									
4	L1	53.0°C	86.1°C																																																																																									
5	L2	52.4°C	87.0°C																																																																																									
6	C10	52.8°C	87.4°C																																																																																									
7	Q1	49.7°C	86.4°C																																																																																									
8	C5	50.7°C	85.8°C																																																																																									
9	U2	62.1°C	97.9°C																																																																																									
10	C36	56.7°C	93.5°C																																																																																									
11	BD1	58.3°C	91.6°C																																																																																									
12	D8	58.3°C	92.9°C																																																																																									
13	Q5	56.6°C	92.6°C																																																																																									
14	T1	79.8°C	116.1°C																																																																																									
15	C202	61.7°C	98.3°C																																																																																									
16	C105	69.8°C	107.0°C																																																																																									
17	U100	78.7°C	114.4°C																																																																																									
18	U101	56.5°C	93.1°C																																																																																									
19	Q100	76.7°C	108.6°C																																																																																									
20	RTH3	58.4°C	96.0°C																																																																																									
21	LF1	47.5°C	83.7°C																																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 146.5 % LOAD Ta : 25°C	TEST : OK																																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 85VAC/305VAC O/P : 80/100 % LOAD Ta=-35/-45 °C	TEST : OK																																																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE	I/P : 315 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																								

5	TEMPERATURE COEFFICIENT	$\pm 0.05\%/^{\circ}\text{C}(0\sim 60^{\circ}\text{C})$	I/P : 230 VAC O/P : FULL LOAD	$\pm 0.016\%/^{\circ}\text{C}(0\sim 60^{\circ}\text{C})$
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=50 °C LIFE TIME		(1) 1261915HRS (2) 72616HRS (3) 394485HRS (4) 1049615HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 2163.5K hrs min. Telcordia SR-332 (Bellcore) ; 250.4K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQIN/ZHOUBIAO	WENF	WUWQ

2020.10.1 TAG-QA-009