



Test Report: HBGC-300-H

300W Constant Power MODE LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test


■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	±5%	I/P: 100 VAC / 305 VAC O/P: FULL/ MIN LOAD Ta: 25°C	<±5%
2	CONSTANT CURRENT REGION	29 V~ 58 V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	20 V~ 58 V
3	OPEN CIRCUIT VOLTAGE (max.)	62 V	I/P: 230 VAC O/P: NO LOAD	58.8V
4	CURRENT RIPPLE	5.0% max. @rated current	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	2.36%
5	CURRENT ADJ. RANGE	2.6A ~ 8.67A	I/P: 230 VAC O/P: TESTING Ta: 25°C	2.54 A ~ 8.71A
6	CONSTANT POWER	O/P: 301.6W	I/P: 230 VAC O/P: Vo×Io	TEST: OK
7	SET UP TIME (Max)	500ms/115VAC 500ms/230VAC	I/P: 115 VAC I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	458 ms/115 VAC 484 ms/230 VAC


INPUT=115VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH2: AC Input Voltage

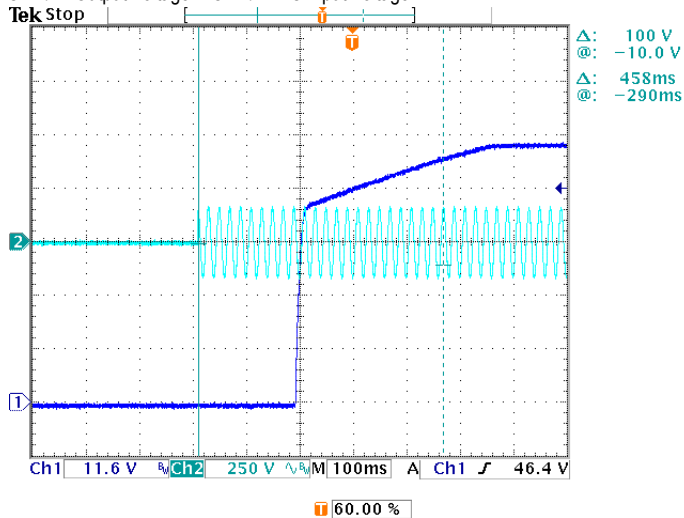

INPUT=230 VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH2: AC Input Voltage


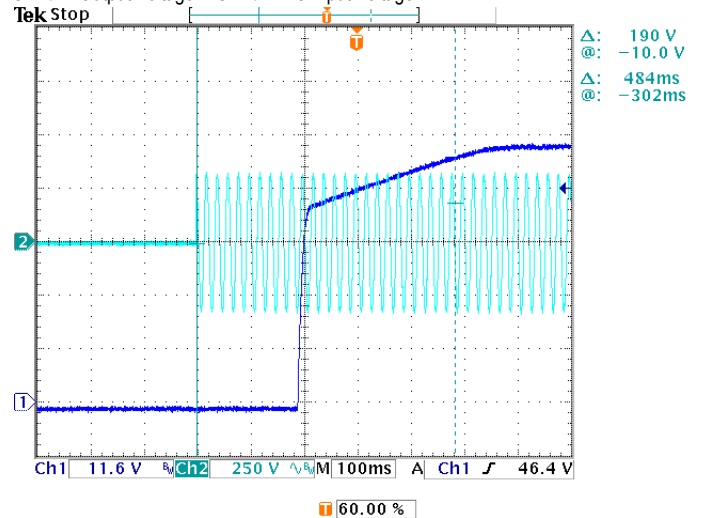


8 DIMMING OPERATION (for AB-Type)



※ 3 in 1 dimming function(for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



○ Applying additive 0 ~ 10VDC

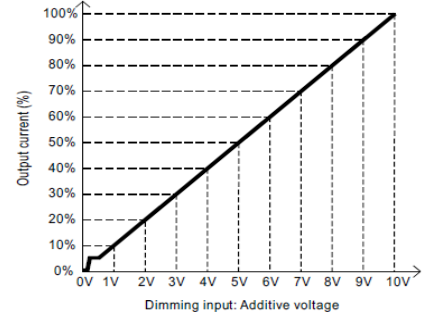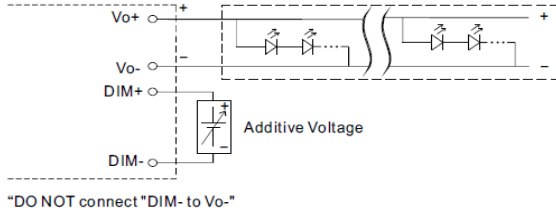

○ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

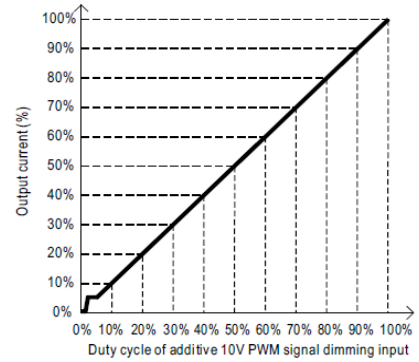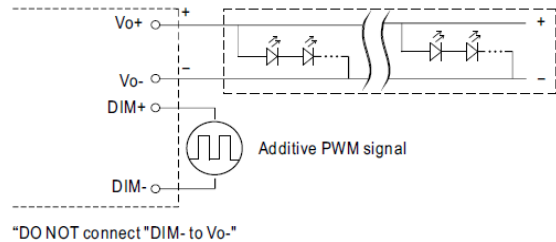

○ Applying additive resistance:

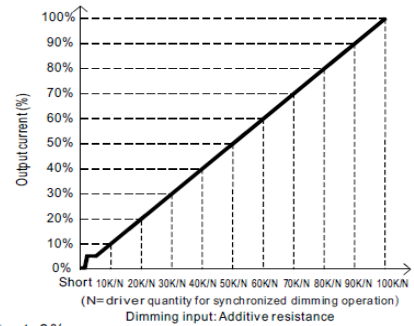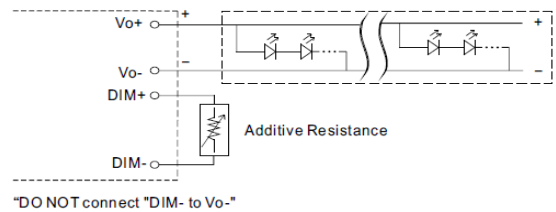

Note : 1. Min. dimming level is about 8% and the output current is not defined when $0\% < I_{out} < 8\%$.
 2. The output current could drop down to 0% when dimming input is about $0k\Omega$ or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC

O/P: DIMMING TEST

Ta: 25 $^{\circ}$ C


1	DIMMING	Short	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
	Output Current	0	0.6237	1.1733	1.6490	2.2077	2.6866	3.1692	3.7366	4.2234	4.7544	5.2264	5.2261
%	0%	11.99%	22.56%	31.71%	42.46%	51.67%	60.95%	71.86%	81.22%	91.43%	100.51%	100.50%	
2	PWM	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
	Output Current	0	0.6125	1.0752	1.6338	2.1174	2.6138	3.1564	3.6426	4.1964	4.7212	5.2147	5.2174
%	0%	11.78%	20.68%	31.42%	40.72%	50.27%	60.70%	70.05%	80.70%	90.79%	100.28%	100.33%	
3	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
	Output Current	0	0.6242	1.1640	1.6451	2.1222	2.6817	3.1639	3.6899	4.1749	4.7058	5.2124	5.2248
%	0%	12.00%	22.38%	31.64%	40.81%	51.57%	60.84%	70.96%	80.29%	90.50%	100.24%	100.48%	

TEST RESULT: OK

TEST RESULT: OK

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P: TESTING O/P: FULL LOAD (PLEASE CHECK DERATING CURVE) Ta: 25°C	87V~305 V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~305 VAC O/P: FULL~NO LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	115VAC/ 3.0 A 230 VAC/ 1.6 A 277 VAC/ 1.3 A	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I=2.813A/ 115VAC I = 1.388A/ 230VAC I = 1.118A/277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.342mA N-FG: 0.342mA
5	NO LOAD/STANDBY POWER CONSUMPTION	<0.5W for A/B/DA-Type	I/P: 230VAC O/P: NO LOAD/STANDBY Ta: 25°C	0.39W
6	INRUSH CURRENT(Typ)	230 V/ 45A COLD START (twidth=1300us measured at 50% Ipeak) COLD START at 230V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I=38.2A/ 230VAC Twidth = 864us

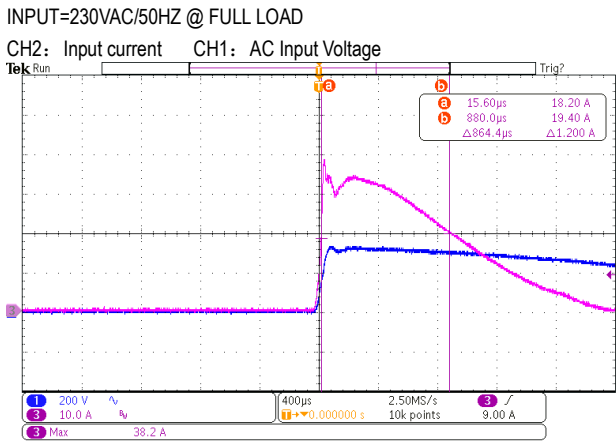





300W Constant Power Mode LED Driver

HBGC-300 series


7	POWER FACTOR	0.97/115VAC@ FULL LOAD 0.95/230VAC@ FULL LOAD 0.92/277VAC@ FULL LOAD	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.999 @ FULL LOAD /115VAC PF=0.987 @ FULL LOAD /230VAC PF=0.958@ FULL LOAD /277VAC
---	--------------	--	--	---

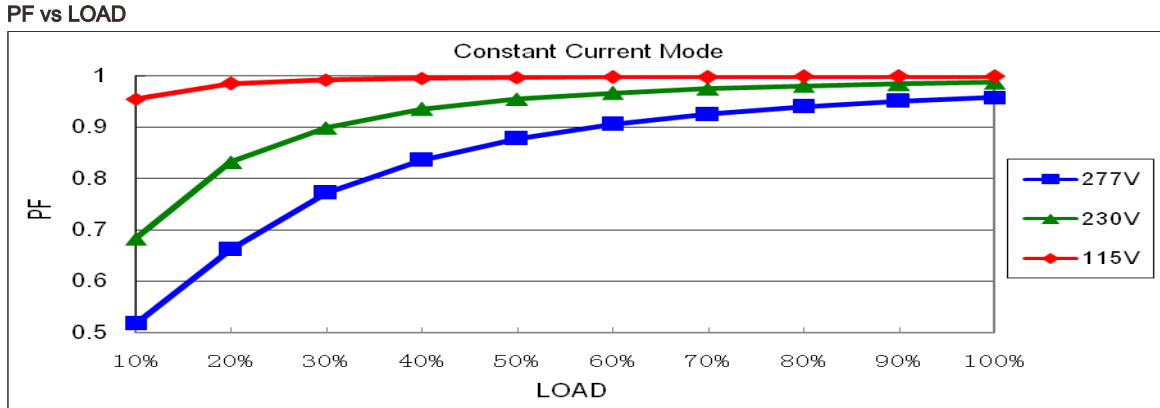

8	TOTAL HARMONIC DISTORTION	THD < 10% (@load ≥ 50%/115VAC; @load ≥ 50%/230VAC; @load ≥ 75%/277VAC)	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: 50% /75% LOAD Ta: 25°C	THD=3.89% @50% load /115VAC THD=6.32% @50% load /230VAC THD=8.14% @75% load /277VAC
---	---------------------------	---	--	---

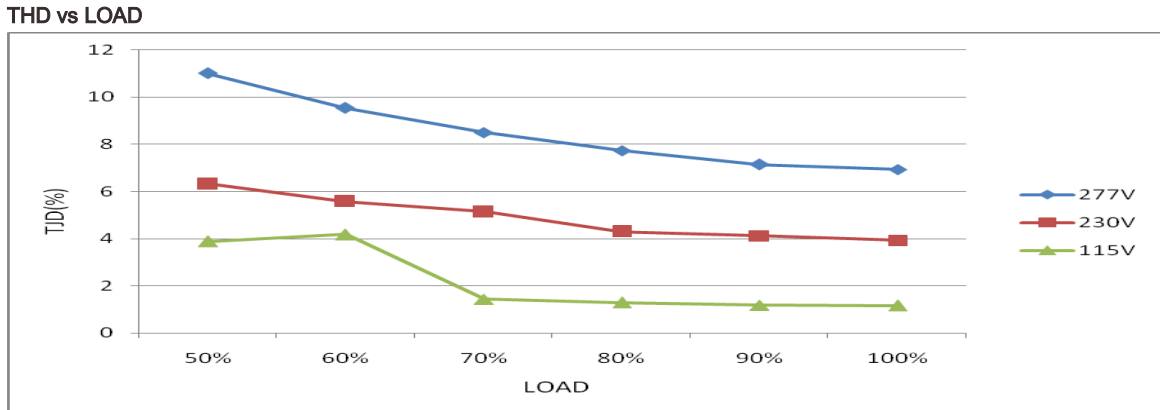

9	EFFICIENCY(Typ)	92.5%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	94.06%
---	-----------------	-------	---	--------

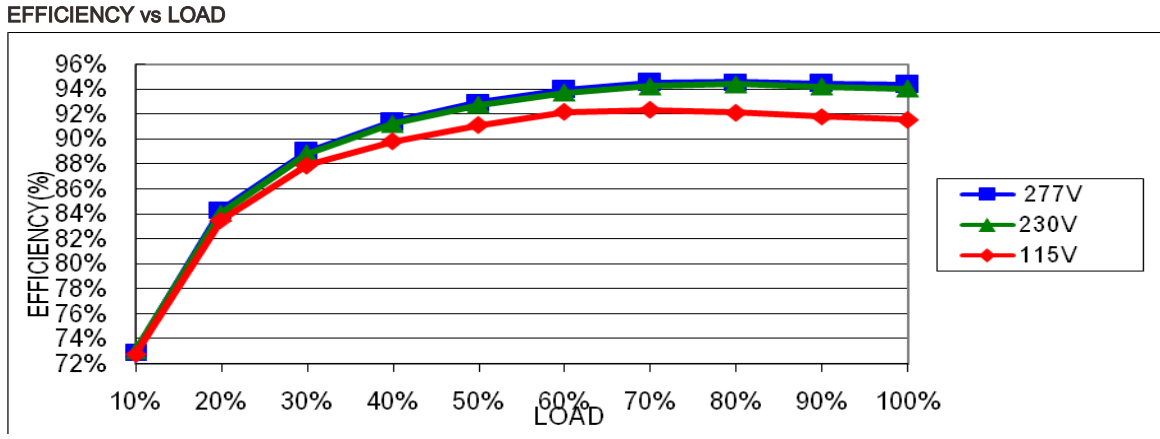

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	61V~78V	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: NO LOAD	64.61V/ 100VAC 64.82V/ 230VAC 64.73V/ 305VAC Shut down output voltage, re-power on to recovery
2	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD	O.T.P. Active T _{case} >85°C±5°C, derate power automatically by 6%/°C max
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE constant current limiting ,recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5 Rated 23.9A/600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1)540V (2) 548V (3) 462V
2	PFC Transistor	Q1 Rated 23.9A/600V	I/P: High-Line +3V =308V O/P: (1)Full Load (2)Output Short (3) Full Load continue	(1)500V (2)472V (3)498V
3	P.F.C DIODE	D1 Rated 12A/ 600 V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1)448V (2)442V (3)458V
4	Diode Peak Voltage	Q100 Rated 35A/150V	I/P: High-Line +3V =308V O/P: (1)Full Load (2)Output Short (3) Full Load continue (4) No Load Ta: 25°C	(1)121V (2)20V (3)123V (4)123V
5	Input Capacitor Voltage	C5 Rated: 150 μ / 450 V	I/P: High-Line +3V =308 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta: 25°C	(1)444V (2)452V (3)468V (4)448V

6	Control IC Voltage Test	U2 Rated 16 V	I/P: High-Line +3V =308V O/P(1)FULL LOAD (2) Output Short (3)O.V.P. (4)NO LOAD VR.LOW LINE Ta: 25°C	(1) 12.6V (2) 12.7V (3) 12.6V (4) 12.6V
---	-------------------------	------------------	--	--

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG: 2 KVAC/min<4.5mA O/P-FG: 1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG: 1.8 KVAC/min Ta: 25°C	I/P-O/P: 2.875 mA I/P-FG: 2.530mA O/P-FG: 3.804mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG: 500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: >9999MΩ I/P-FG: >9999 M.Ω O/P-FG: >9999 M.Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	22mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P: FULL/50% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY Air: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 2KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N : 4KV L-PE: 6KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results please refer to the latest EMC test report.			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																
1	TEMPERATURE RISE TEST	MODEL: HBGC-300-H 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 28.2°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=54.6°C																																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 28.2 °C</th> <th>HIGH AMBIENT Ta=54.6 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF2</td><td>57.5°C</td><td>84.3°C</td></tr> <tr><td>2</td><td>BD1</td><td>61.7°C</td><td>88.8°C</td></tr> <tr><td>3</td><td>D1</td><td>61.6°C</td><td>88.5°C</td></tr> <tr><td>4</td><td>Q1</td><td>61.7°C</td><td>89.0°C</td></tr> <tr><td>5</td><td>L1</td><td>58.0°C</td><td>85.0°C</td></tr> <tr><td>6</td><td>C5</td><td>58.5°C</td><td>85.1°C</td></tr> <tr><td>7</td><td>C41</td><td>51.2°C</td><td>77.8°C</td></tr> <tr><td>8</td><td>U1</td><td>50.2°C</td><td>76.9°C</td></tr> <tr><td>9</td><td>U2</td><td>51.4°C</td><td>78.0°C</td></tr> <tr><td>10</td><td>Q6</td><td>65.4°C</td><td>93.2°C</td></tr> <tr><td>11</td><td>T1</td><td>72.6°C</td><td>102.7°C</td></tr> <tr><td>12</td><td>Q100</td><td>63.9°C</td><td>93.2°C</td></tr> <tr><td>13</td><td>Q101</td><td>62.4°C</td><td>91.4°C</td></tr> <tr><td>14</td><td>R271</td><td>48.4°C</td><td>74.9°C</td></tr> <tr><td>15</td><td>U107</td><td>55.5°C</td><td>82.7°C</td></tr> <tr><td>16</td><td>T500</td><td>51.3°C</td><td>78.0°C</td></tr> <tr><td>17</td><td>C105</td><td>54.5°C</td><td>82.2°C</td></tr> <tr><td>18</td><td>R8</td><td>63.1°C</td><td>88.1°C</td></tr> <tr><td>19</td><td>Tc</td><td>46.1°C</td><td>72.3°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 28.2 °C	HIGH AMBIENT Ta=54.6 °C	1	LF2	57.5°C	84.3°C	2	BD1	61.7°C	88.8°C	3	D1	61.6°C	88.5°C	4	Q1	61.7°C	89.0°C	5	L1	58.0°C	85.0°C	6	C5	58.5°C	85.1°C	7	C41	51.2°C	77.8°C	8	U1	50.2°C	76.9°C	9	U2	51.4°C	78.0°C	10	Q6	65.4°C	93.2°C	11	T1	72.6°C	102.7°C	12	Q100	63.9°C	93.2°C	13	Q101	62.4°C	91.4°C	14	R271	48.4°C	74.9°C	15	U107	55.5°C	82.7°C	16	T500	51.3°C	78.0°C	17	C105	54.5°C	82.2°C	18	R8	63.1°C	88.1°C	19	Tc	46.1°C	72.3°C
NO	Position	ROOM AMBIENT Ta= 28.2 °C	HIGH AMBIENT Ta=54.6 °C																																																																																	
1	LF2	57.5°C	84.3°C																																																																																	
2	BD1	61.7°C	88.8°C																																																																																	
3	D1	61.6°C	88.5°C																																																																																	
4	Q1	61.7°C	89.0°C																																																																																	
5	L1	58.0°C	85.0°C																																																																																	
6	C5	58.5°C	85.1°C																																																																																	
7	C41	51.2°C	77.8°C																																																																																	
8	U1	50.2°C	76.9°C																																																																																	
9	U2	51.4°C	78.0°C																																																																																	
10	Q6	65.4°C	93.2°C																																																																																	
11	T1	72.6°C	102.7°C																																																																																	
12	Q100	63.9°C	93.2°C																																																																																	
13	Q101	62.4°C	91.4°C																																																																																	
14	R271	48.4°C	74.9°C																																																																																	
15	U107	55.5°C	82.7°C																																																																																	
16	T500	51.3°C	78.0°C																																																																																	
17	C105	54.5°C	82.2°C																																																																																	
18	R8	63.1°C	88.1°C																																																																																	
19	Tc	46.1°C	72.3°C																																																																																	
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/90VAC O/P: FULL LOAD/80% LOAD Ta= -45°C/-35°C	TEST: OK																																																																																
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=50 °C HUMIDITY= 95% R.H	TEST: OK																																																																																
4	TEMPERATURE COEFFICIENT	±0.03%/°C (0~60°C)	I/P: 230 VAC O/P: FULL LOAD	±0.028%/°C (0~60°C)																																																																																
5	STORAGE TEMPERATURE TEST	-40~+80°C	1. Thermal shock Temperature: -45°C~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 200CYCLE 5. Input/Output condition:																																																																																	



300W Constant Power Mode LED Driver

HBGC-300 series

6	THERMAL SHOCK TEST	-40~+50°C	1. Thermal shock Temperature: -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16CYCLE 5. Input/Output condition: 15cycle:230VAC/ FULL LOAD AC on 3 sec/AC off 1 sec TEST 1cycle:230VAC/ FULL LOAD Burn In Test TEST: OK
7	VIBRATION TEST	10~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 6G (5) Test Time: 180min in each axis (X.Y.Z) (6) Ta: 25°C
8	CAPACITOR LIFE CYCLE	HBGC-300-H: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Tc= 70 °C LIFE TIME (2) I/P: 230VAC O/P: 75% LOAD Tc= 70 °C LIFE TIME (3) I/P: 230VAC O/P: 50% LOAD Tc= 70 °C LIFE TIME	(1) 83676 HRS (2) 95875 HRS (3) 106039 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 1772.9K hrs min. Telcordia SR-332 (Bellcore) ; 175.4K hrs min. MIL-HDBK-217F (25°C)	
10	Ongoing Reliability Test	I/P: 230VAC O/P: FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/ZHOUB	WENF	LIUWY